



RVR Silica fibre insulated tapes

Characteristics


- Highly flexible.
- Very high power rating: 350 W/m.
- High temperature: up to + 900°C
- Not damp-proof.
- Voltage 230 V as standard.
- Power cable: length 400 mm as standard.

Applications

RVR silica fibre tapes are mainly for use in laboratories and in industry if a high concentration of power is necessary or if it is required to work at high temperature, as the "silica fibre" enables the heating element to withstand temperatures of up to 900°C.

These heating tapes are for use only in dry buildings, provided extra electrical protection precautions are taken.

To ensure that these heating elements enjoy a long service life, we recommend using a control device.

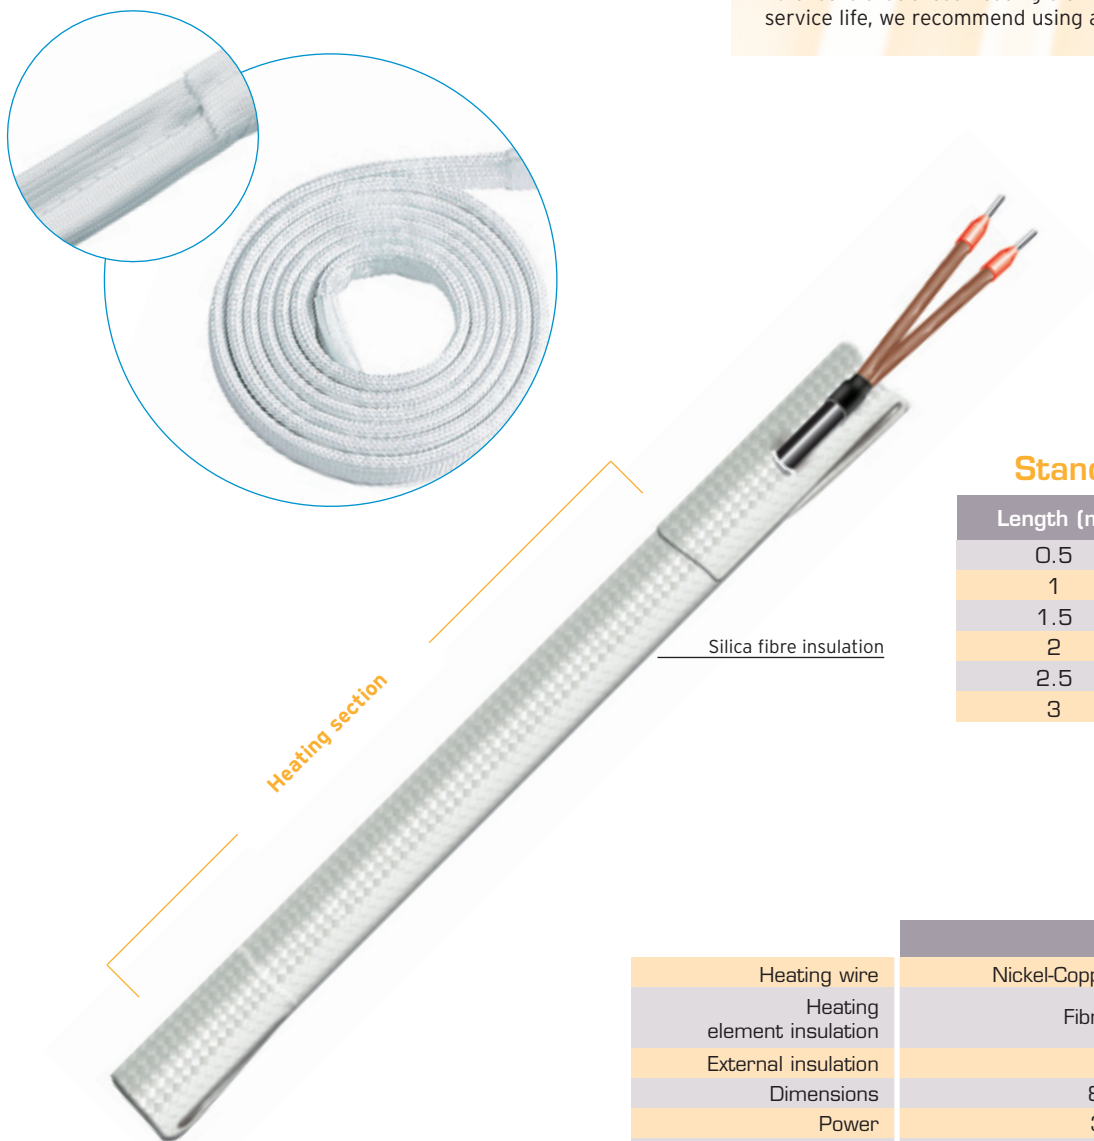

Standard models

Length (m)	Power (W)
0.5	175
1	350
1.5	525
2	700
2.5	875
3	1050

	RVR
Heating wire	Nickel-Copper or Nickel-Chrome
Heating element insulation	Fibre glass braid
External insulation	Silica fibre
Dimensions	8 x 30 mm
Power	350 W/m
Permissible surface temperature	up to + 900°C
Tolerance	Power ± 10 %

Use

Heating tapes are series resistors. Consult the pages of the catalogue devoted to the corresponding general operating principles, general instructions for use and accessories.

FLEXELEC S.A.S

10, rue des frères Lumière
 Z.A. du Bois Rond
 69720 ST BONNET DE MURE - FRANCE
 Tel: + 33 (0)4.72.48.30.90
 Fax: + 33 (0)4.78.40.82.81
 E-mail: flexelec@omerin.com

FLEXELEC Dept

OMERIN ASIA Pte Ltd
 51 Goldhill Plaza #08-12/01
 SINGAPORE 308900
 Tel: + 65.6255.4778
 Fax: + 65.6255.4779
 E-mail: sales@omerin.com.sg

FLEXELEC (UK) Ltd

Unit 11 Kings Park Industrial Estate
 Primrose Hill - KINGS LANGLEY
 Hertfordshire - WD4 8ST - UK
 Tel: + 44 (0) 1923.274477
 Fax: + 44 (0) 1923.270264
 E-mail: sales@omerin.co.uk

FLEXELEC Dept

OMERIN GmbH
 Tennweg 2 B
 D-65510 IDSTEIN - GERMANY
 Tel: + 49 (0) 6126.94.31-0
 Fax: + 49 (0) 6126.83.99
 E-mail: omeringmbh@omerin.com